



DONGFENG



NEW

CAPTAIN E

4-WHEELER | 12FT

CAPTAIN N

6-WHEELER | 16FT

3 YEARS
OR 100,000 KM
WARRANTY

*Also available in Captain N 6-wheeler - 14ft.




DONGFENG

CAB FEATURES




PERFORMANCE & TRANSMISSION

High quality, proven, reliable, turbocharged & intercooled Nissan ZD30 engine.

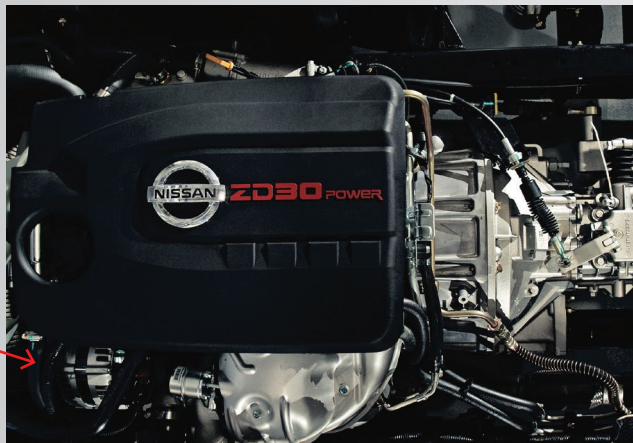


5-speed transmission by Wanliyang. (WANLIYANG is a reputable international OEM transmission supplier.)

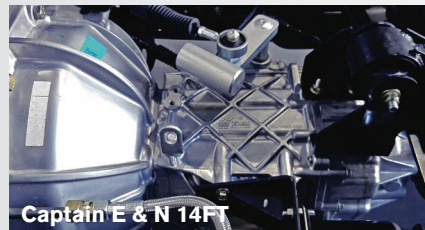

Captain E & N 14FT



8-speed transmission by Fast. (FAST BY EATON is a Global leader in commercial vehicle transmissions.)

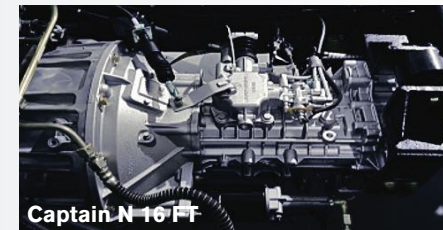

Captain N 16 FT



LEAF SPRING WITH DOUBLE ACTING SHOCK ABSORBERS AND STABILIZERS (CAPTIAN N)



CHASSIS



American Dana Technology front and rear axles to ensure high reliability and durability.



Full air brake system (Captain N)

SAFETY & INTERIOR



3-Point Emergency locking Retractor Seatbelts is a passive safety feature that keeps the driver and co-driver secure during harmful movements during collisions

Adjustable seats wrapped in fabric material for comfortable journey with tuner & USB audio, Heating Ventilation, & Air-condition.



Engine Exhaust Brake is an active safety feature that uses engine exhaust to reduce speed during downhill, enhances safety of the vehicle (Captain E & Captain N 14ft).

REAR BODY TYPE OPTIONS

CAPTAIN E 12 FT
CAPTAIN N 14FT | 16FT



Dropside

Aluminum Van

Refrigerated Van

Mobile Clinic

SPECIFICATIONS		CAPTAIN E(12ft)	CAPTAIN N(14ft)	CAPTAIN N(16ft)
DIMENSIONS				
Wheelbase	(mm)	2,800	3,308	3,800
Length x Width x Height	(mm)	5,500 x 1,980 x 2,300	5,995 x 1,980 x 2,300	6,995 x 2,120 x 2,510
WEIGHT(kg)				
GVW	(kg)	4,200	4,450 (TRUCK BAN EXEMPTED)	7,500
Payload	(kg)	2,000	2,500	4,450
ENGINE				
Model		Nissan ZD30D13-4N		Nissan ZD30D15-5N
Type		4-cylinder, Turbocharged with Intercooler, Electric Controlled High Pressure Common-rail Double Overhead Camshaft DOHC Diesel Engine		
Displacement	(cc)	2,953 cc (3.0L)		
Rated Power	(hp)	130 @ 3,200 rpm		150 @ 3,200 rpm
Max Torque	(N-m)	280 @ 1,600 - 2,600 rpm		370 @ 1,600 - 2,600 rpm
Emission Standard		Euro IV		Euro V (requires ADBLue)
Fuel Tank Capacity	(L)	80 liters (Plastic fuel tank)		125 liters (Steel)
TRANSMISSION				
Model / Type		SGT32 / 5-Speed overdrive, Synchronmesh on all forward Gears		FAST / 8 speed (8J45) overdrive, Synchronmesh on all forward Gears w/ range selector
Gear Ratio		1st-4.717 / 2nd-2.513 / 3rd-1.679 / 4th-1.00 / 5th-0.719 / Rev.-4.494		1st-9.530 / 2nd-5.960 / 3rd-3.970 / 4th-3.190 / 5th-2.400 / 6th-1.500 / 7th-1.00 / 8th-0.800 / Rev1-9.680 / Rev2-2.44
Clutch		Dry single plate w/ diaphragm springs, hydraulic control		
DIFFERENTIAL				
Final Gear Ratio		4.875		4.33
BRAKES				
Type		Hydraulic brake, dual circuit with vaccum assist	Full Air Brake, dual circuit	
Auxiliary		Exhaust brake vaccum controlled, switch located on steering wheel		ABS (Anti-lock Braking System)
Parking		Mechanical lever type, internal expanding at rear of transmission	Spring brake acting on rear wheels	
STEERING				
Type		Power Steering, Recirculating Ball & Nut, Tilting, Telescopic, with Audio Control	Power Steering, Recirculating Ball & Nut, Tilting, Telescopic, with Audio Control, and Cruise Control	
WHEEL AND TYRE				
Size (Diameter)		7.00 R16 LT 12PR Tubeless		7.50 R16 14PR Tube type
Number of Stud		5 Studs		6 Studs
ELECTRICAL SYSTEM				
Battery		12V 100Ah x1		12V 120Ah x 1
Alternator		14V- 90A		14V- 135A
Cab-Aircon		Heating Ventilation and Aircondition		
Cabin		Power Windows, Keyless Entry w/remote, Stereo + USB		

DEALER

MARCH 2022

PAI | **PilipinasAuto**

Lot 33 Block 30 Mayor Gil Fernando Avenue corner Mount Everest St., Marikina City 1800
Telephone: (632) 8654 0000

Pilipinas Autogroup Inc. reserves the right to change and vary the design, technical specifications at any time, without prior notice, as per the Company's policy of continuous product improvement. The illustrations may show accessories and items of optional equipment which are not part of standard specifications. Colors may vary slightly from those shown, owing to limitations of printing process.